

1

2




3

4

NOTES:

- (1) PURGE ALL WATER SUPPLY LINES TO REMOVE SOLIDS PRIOR TO TOY INSTALLATION.
- (2) PROVIDE ELECTRICAL BOND WITH POOL REBAR.
- (3) INSTALL ALL WATER TOYS PLUMB AND LEVEL.
- (4) PROVIDE STRAINER UPSTREAM OF TOY WITH MAX 1832" (0.8mm) PERFORATIONS.

REFER TO INSTALL DIAGRAM FOR ANCHOR PLATE DETAILS

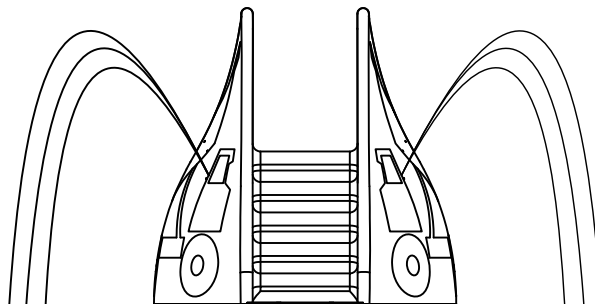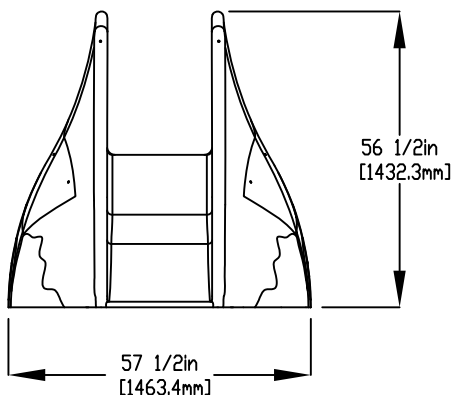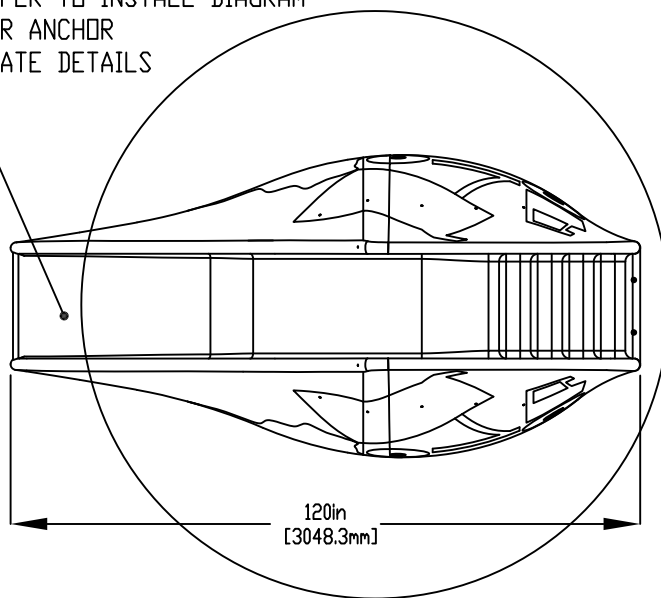

TO BE PROVIDED BY CONTRATOR
2" (50mm) COUPLING
2" (50mm) TO 1" (25mm) REDUCER
1" (25mm) HOSE BARB & SS CLAMP

1" (25mm) FLEX HOSE
SUPPLIED BY EMPEX

2" (50mm) SCH 40 PVC
WATER FEED TO BE EXTENDED
8" (200mm) ABOVE SLAB

8in [203.2mm]

Notes: Overall dimensions of toys are approximate.
Approximate Weight: 156lbs / 70.4kgs

© EMPEX WATERTOYS



WATER SUPPLY

30 gpm @ 25 psi
1.89L/S @ 17.5m

AQUAWAVE

ABU450

01/04/2020

SCALE:

Sheet
1 of 1