

1

2

3

4

NOTES:

- (1) PURGE ALL WATER SUPPLY LINES TO REMOVE SOLIDS PRIOR TO TOY INSTALLATION.
- (2) PROVIDE ELECTRICAL BOND WITH POOL REBAR.
- (3) INSTALL ALL WATER TOYS PLUMB AND LEVEL.
- (4) PROVIDE STRAINER UPSTREAM OF TOY WITH MAX 1/32" (.08mm) PERFORATIONS.

A

A

B

B

C

C

D


D

E

E

F

F

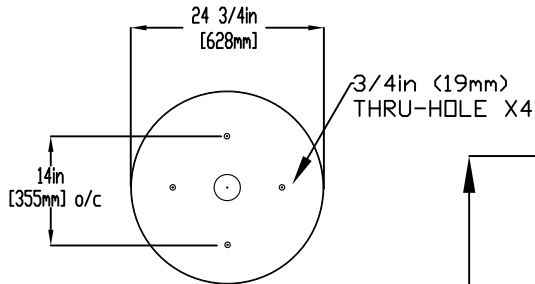

MOUNTING PLATE DETAIL

78in [1981.2mm] SPRAY DISTANCE

60in [1524.0mm] SPRAY HEIGHT

28 1/2in [723.9mm]

22 3/8in [567.7mm]

52 1/2in [1334.9mm]

BOLT DOME TO UNIT AFTER INSTALL

2" (50mm) COUPLING  
 2" (50mm)-1" (25mm) REDUCER  
 1" (25mm) HOSEBARB + SS CLAMP TO BE PROVIDED BY CONTRACTOR.

1" (25mm) FLEX HOSE PROVIDED BY EMPEX.

1/2" (50mm) 8" (203mm) 316SS THREADED ROD, C/W FENDER WASHER, LOCK WASHER & NUT (X4), MINIMUM 6" (150mm) EMBEDMENT, EPOXY SET ANCHOR ADHESIVE TO BE PROVIDED BY CONTRACTOR.

8in [203.2mm]

6in [152.2mm]

WATERFEED  
 2" (50mm) SCH 40 PVC PIPE  
 6" (152mm) ABOVE SLAB.

Notes: Overall dimensions of toys are approximate.  
 Approximate Weight: 26lbs / 11.8kgs

© EMPEX WATERTOYS



WATER SUPPLY  
 30 gpm @ 5 psi  
 1.89L/S @3.5m

AQUAPIP DOLCE

AD804

01/08/2020

SCALE:

Sheet 1 of 1

1

2

3

4