

1

2

3

4

NOTES:

(1) PURGE ALL WATER SUPPLY LINES TO REMOVE SOLIDS PRIOR TO TOY INSTALLATION.

(2) PROVIDE ELECTRICAL BOND WITH POOL REBAR.

(3) INSTALL ALL WATER TOYS PLUMB AND LEVEL.

(4) PROVIDE STRAINER UPSTREAM OF TOY WITH MAX 1/32" (0.8mm) PERFORATIONS.

A

A

B

B

C

C

D

D


E

E


F

F

ø96in
[2438.4mm]
SPRAY DIAMETER




3/4in (19mm)
THRU-HOLE X4

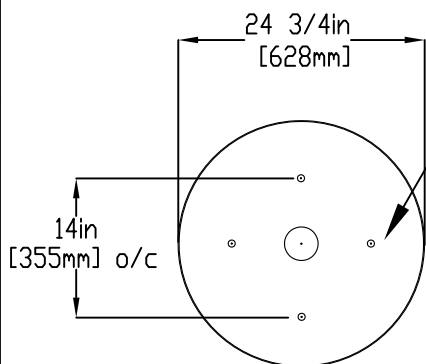

MOUNTING PLATE DETAIL

59 3/4in
[1516.4mm]
SPRAY HEIGHT

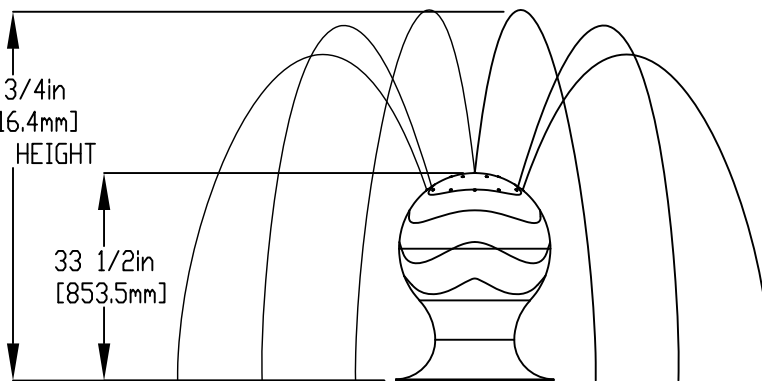

33 1/2in
[853.5mm]

1" (25mm) FLEX HOSE
PROVIDED BY EMPEX.

ABOLT DOME TO UNIT
AFTER INSTALL

2" (50mm) COUPLING
2" (50mm)-1" (25mm) REDUCER
1" (25mm) HOSEBARB W/SS CLAMP
TO BE PROVIDED BY CONTRACTOR

1/2" (13mm) X 8" (203mm) 31SS
THREADED ROD C/W FENDER WASHER,
LOCK WASHER & NUT (X4), MINIMUM
6" (150mm) EMBEDMENT. EPOXY SET

WATERFEED
2" (50mm) SCH 40 PVC PIPE
6" (152mm) ABOVE SLAB.

8in [203.2mm]

Notes: Overall dimensions of toys are approximate.
Approximate Weight: 42lbs / 19.1kgs

© EMPEX WATERTOYS



WATER SUPPLY

30 gpm @ 25 psi
1.89L/S @17.5m

AQUASPHERE DOLCE

AD807

09/02/2022

SCALE:

Sheet
1 of 1

1

2

3

4