

1

2

3

4

**NOTES:**

(1) PURGE ALL WATER SUPPLY LINES TO REMOVE SOLIDS PRIOR TO TOY INSTALLATION.

(2) PROVIDE ELECTRICAL BOND WITH POOL REBAR.

(3) INSTALL ALL WATER TOYS PLUMB AND LEVEL.

(4) PROVIDE STRAINER UPSTREAM OF TOY WITH MAX 1#32" (0.8mm) PERFORATIONS.

A

A

B

B

C

C

D

D



E

E



F

F

[3048mm]  
Ø 120in  
SPRAY DIAMETER  
NOT TO SCALE

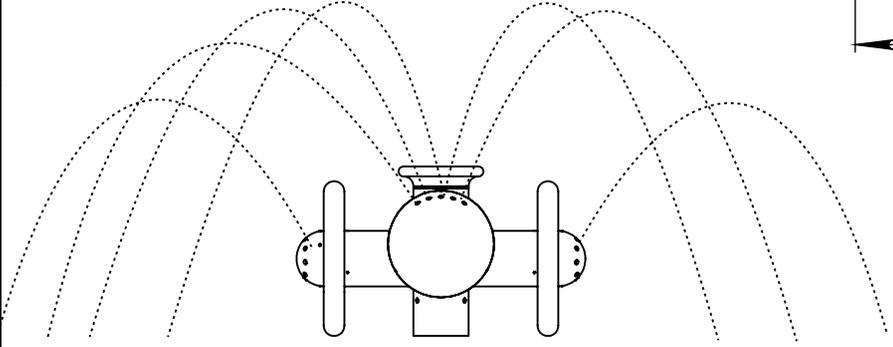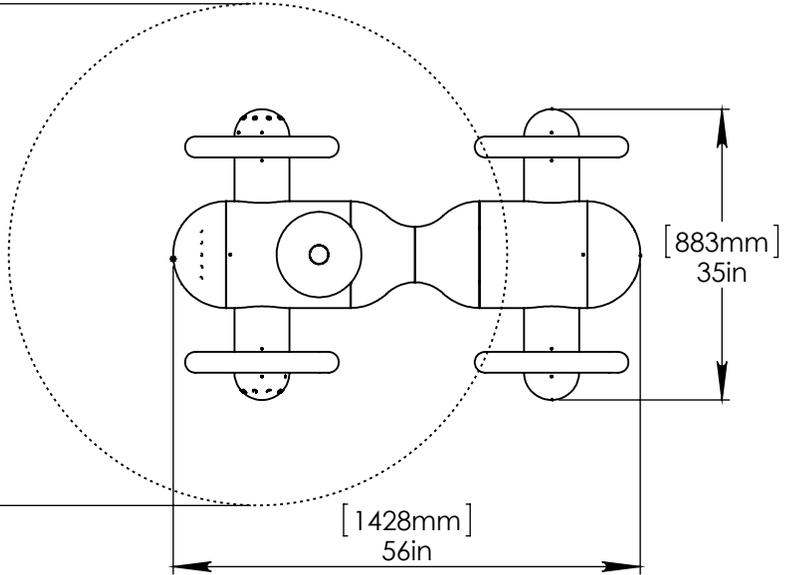


[1524mm]  
60in  
SPRAY HEIGHT  
NOT TO SCALE

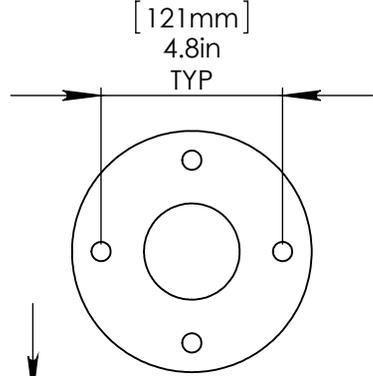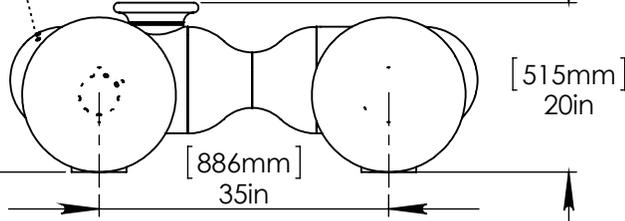

FLANGE DETAIL

- (3) LOWER TOY AND BOLT TO INSERT.
- (2) MAKE PLUMBING CONNECTION.
- (1) BOLT INSERT.

1/2" (13mm) STAINLESS STEEL (316) THREADED ROD, WASHER, LOCK WASHER, & NUT. SUGGESTED 7" (180mm) THREADED ROD WITH 5" (150mm) EMBEDMENT.

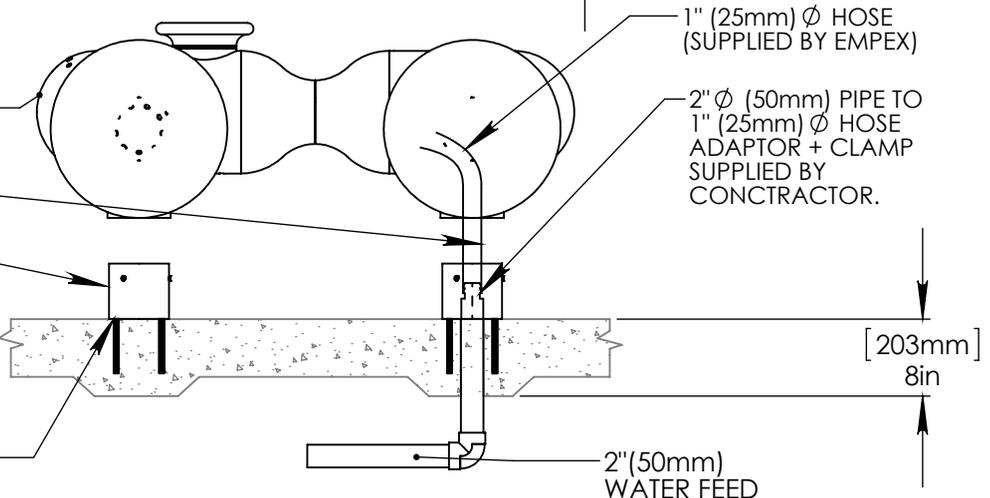

1" (25mm) Ø HOSE (SUPPLIED BY EMPEX)

2" Ø (50mm) PIPE TO 1" (25mm) Ø HOSE ADAPTOR + CLAMP SUPPLIED BY CONTRACTOR.

2" (50mm) WATER FEED

[203mm]  
8in

Notes: Overall dimensions of toys are approximate.

© EMPEX WATERTOYS



WATER SUPPLY  
30 gpm @ 25 psi  
1.89L/S @ 17.5m

# AQUACRUIZER

**AM109**

2/17/2017

SCALE:  
1:23

Sheet  
1 of 1

1

2

3

4