

1

2

3

4

NOTES:

- (1) PURGE ALL WATER SUPPLY LINES TO REMOVE SOLIDS PRIOR TO TOY INSTALLATION.
- (2) PROVIDE ELECTRICAL BOND WITH POOL REBAR.
- (3) INSTALL ALL WATER TOYS PLUMB AND LEVEL.
- (4) PROVIDE STRAINER UPSTREAM OF TOY WITH MAX 1/32" (0.8mm) PERFORATIONS.

A


A

Ø60in
[1524.0mm]
SPRAY DIAMETER
NTS

25 5/8in
[649.5mm]

B

B

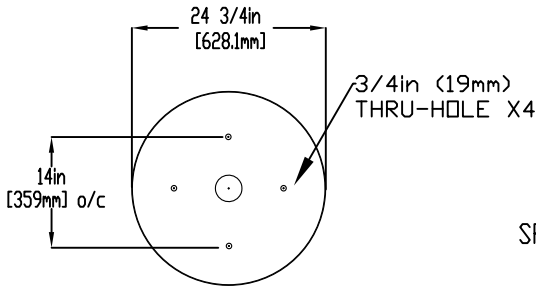

MOUNTING PLATE DETAIL

78 1/2in
[1995.2mm]
SPRAY HEIGHT

62 3/4in
[1593.7mm]

C

C

D

D

LOWER TOY OVER SLEEVE
AFTER BASE PLATE IS SECURE

5/8" (16mm) X 7" (178mm) 316SS
THREADED ROD C/W FENDER WASHER,
LOCK WASHER, & NUT (X4). MINIMUM
6" (152mm) EMBEDMENT, EPOXY SET
ANCHOR ADHESIVE
TO BE PROVIDED BY CONTRACTOR

1" (25mm) FLEX HOSE
PROVIDED BY EMPEX.

2" (50mm) COUPLING
2" (50mm) -1" (25mm) REDUCER
1" (25mm) HOSEBARB W/ SS CLAMP
TO BE PROVIDED BY CONTRACTOR

E

E

WATERFEED
2" (50mm) PVC SCH 40PIPE
EXTENDED 6" (152mm) ABOVE SLAB

8in [203.2mm]

F

F



Notes: Overall dimensions of toys are approximate.

© EMPEX WATERTOYS

WATER SUPPLY
30 gpm @ 25 psi
1.89L/S @17.5m

AQUATOT WIZARD

AT119

01/05/2020

SCALE:

Sheet
1 of 1

1

2

3

4