

NOTES:

- (1) PURGE ALL WATER SUPPLY LINES TO REMOVE SOLIDS PRIOR TO TOY INSTALLATION.
- (2) PROVIDE ELECTRICAL BOND WITH POOL REBAR.
- (3) INSTALL ALL WATER TOYS PLUMB AND LEVEL.
- (4) PROVIDE STRAINER UPSTREAM OF TOY WITH MAX 1/32" (0.8mm) PERFORATIONS.

A

A

B

B

C

C

D

D


E

E

F


F

120in
[3048mm]
SPRAY DIAMETER
NTS

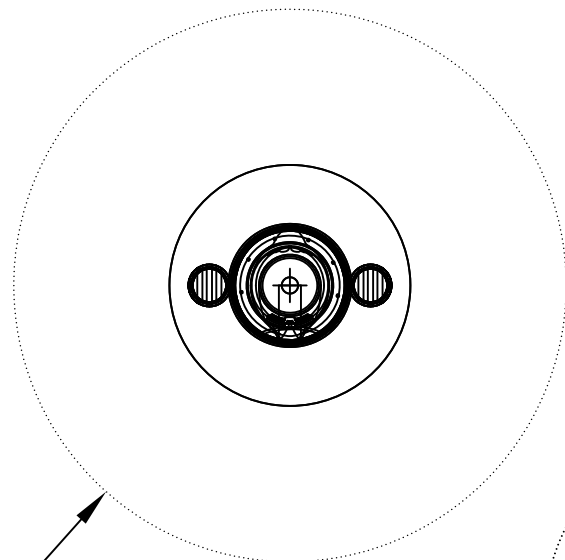


2-WAY
DIVERTER

55in
[1394.9mm]

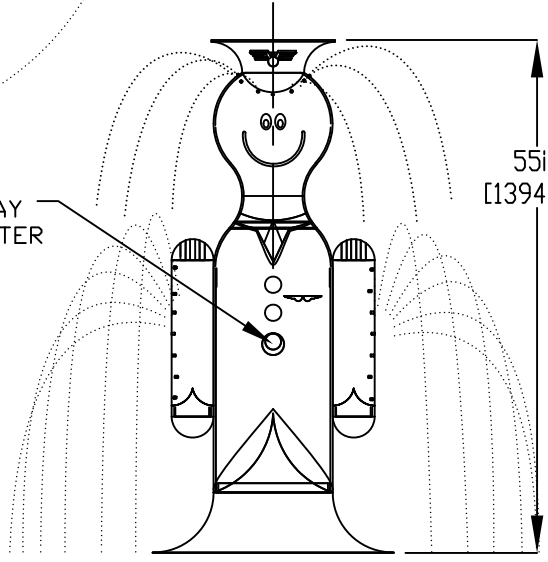

24 3/4in
[628.1mm]

3/4in (19mm)
THRU-HOLE X4

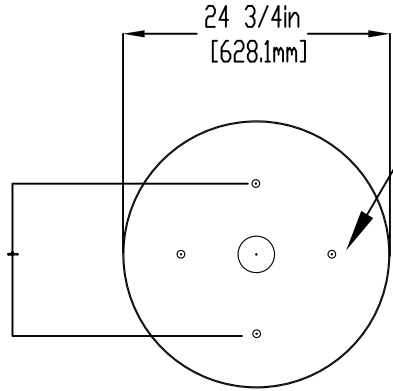

MOUNTING DETAIL

Installation Details.

1. Bolt Flared Bottom to Slab
2. Make Plumbing Connection
3. Lower Toy and Bolt to Insert

1/2" (13mm) X 8" (203mm) 316SS
THREADED ROD, C/W FENDER WASHER
LOCK WASHER & NUT (X4), MINIMUM
6" (152mm) EMBEDMENT, EPOXY SET
ANCHOR ADHESIVE
TO BE PROVIDED BY CONTRACTOR

1" (25mm) FLEX HOSE
PROVIDED BY EMPEX.

2" (50mm) COUPLING
2" (50mm)-1" (25mm) REDUCER
1" (25mm) HOSE BARB W/SS CLAMP
TO BE PROVIDED BY CONTRACTOR

6in [152mm]

8in [203mm]

WATERFEED
2" (50mm) SCH 40 PVC
EXTENDED 6" (152mm) ABOVE SLAB

Notes: Overall dimensions of toys are approximate.

© EMPEX WATERTOYS



WATER SUPPLY
30 gpm @ 25 psi
1.89L/S @17.5m

AQUATOT PILOT

AT126

08/08/2022

SCALE:

Sheet
1 of 1