

1

2

3

4

NOTES:

- (1) PURGE ALL WATER SUPPLY LINES TO REMOVE SOLIDS PRIOR TO TOY INSTALLATION.
- (2) PROVIDE ELECTRICAL BOND WITH POOL REBAR.
- (3) INSTALL ALL WATER TOYS PLUMB AND LEVEL.
- (4) PROVIDE STRAINER UPSTREAM OF TOY WITH MAX PERFORATIONS.


1#32" (0.8mm)

Ø84IN
[2133.6MM]
SPRAY DIAMETER

Ø12 3/4in
[Ø323.9mm]

18in
[458.4mm]

48 3/4IN
[1238.8MM]

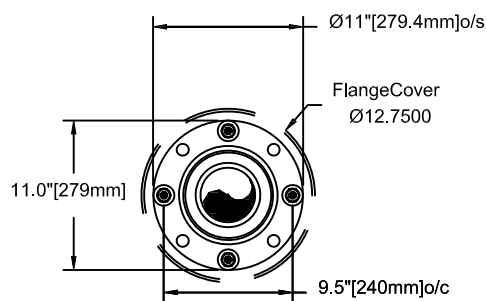

FLOODED COLUMN

LOWER FLANGE COVER
AFTER INSTALL

STAINLESS STEEL(316)
Ø1/2" (13mm) TREADED ROD
WASHER, LOCKWASHER & NUT
7" (180mm) TREADED ROD LENGTH
WITH 5" (120mm) EMBEDMENT.
INSTALL MINIMUM 5 ANCHORS.
TO BE PROVIDED BY CONTRACTOR

2" (50mm) S40 PVC PIPE
WATERFEED

ENSURE LEVEL SURFACE INSTALL
6" (152mm) X 1/8" (3mm) GASKET
PROVIDED BY EMPEX

2" (50mm) FEED PIPE CUT CLOSE
TO ALLOW FULL DRAINAGE
(WINTERIZATION)

8in [202.3mm]



Notes: Overall dimensions of toys are approximate.
Approximate Weight: 32lbs / 14.5kgs

© EMPEX WATERTOYS

WATER SUPPLY

30 gpm @ 25 psi
1.89L/S @17.5m

AQUAWIGL

T270

01/05/2020

SCALE:

Sheet
1 of 1

1

2

3

4