

1

2

3

4


NOTES:

(1) PURGE ALL WATER SUPPLY
LINES TO REMOVE SOLIDS
PRIOR TO TOY INSTALLATION.

(2) PROVIDE ELECTRICAL BOND
WITH POOL REBAR.

(3) INSTALL ALL WATER TOYS
PLUMB AND LEVEL.

(4) PROVIDE STRAINER
UPSTREAM OF
TOY WITH MAX 1#32" (0.8mm)
PERFORATIONS.

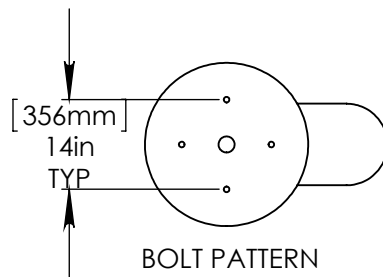

A

A

B

B

C

C

D

D

E

E

F

F

[648mm]
Ø 26in

[962mm]
38in

[2662mm]
105in
SPRAY HEIGHT

[1952mm]
77in

[3045mm]
120in
SPRAY DISTANCE

1"(25mm) FLEX HOSE
PROVIDED BY EMPEX.

2"(50mm)-1"(25mm)
FITTING AND HOSE CLAMP
PROVIDED BY CONTRACTOR.

2"(50mm) SCH 40 PVC
WATERFEED TO BE EXTENDED
8"(200mm) ABOVE SLAB.

STAINLESS STEEL (316)
THREADED ROD, LOCK WASHER
WASHER, & NUT.
THREADED ROD LENGTH 7" (180mm)
WITH 6" (150mm) EMBEDMENT.

[203mm]
8in



Notes: Overall dimensions of toys are approximate.

© EMPEX WATERTOYS

WATER SUPPLY

15 gpm @ 25 psi
1 L/S @ 17.5m

AQUAJOGT805

8/20/2015

SCALE:
1:30Sheet
1 of 1

1

2

3

4