

1

2

3

4

NOTES:

(1) PURGE ALL WATER SUPPLY LINES TO REMOVE SOLIDS PRIOR TO TOY INSTALLATION.


(2) PROVIDE ELECTRICAL BOND WITH POOL REBAR.

(3) INSTALL ALL WATER TOYS PLUMB AND LEVEL.


(4) PROVIDE STRAINER UPSTREAM OF TOY WITH MAX PERFORATIONS. 1#32" (0.8mm)

Ø60in
[1524.0mm]
SPLASH DIAMETER

Ø39in
[990.6mm]

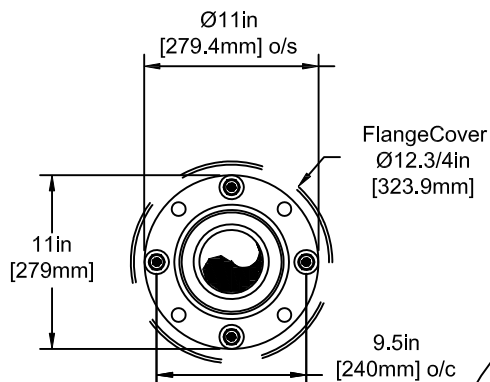

FLANGE DETAIL

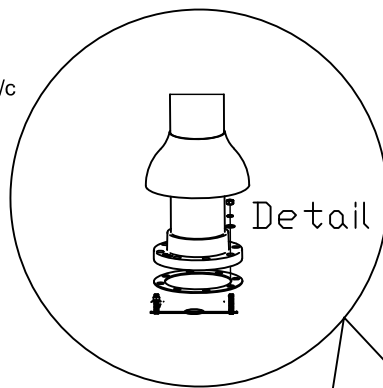

LOWER FLANGE COVER AFTER TOY IS INSTALLED.

LOWER FLANGE COVER AFTER TOY IS INSTALLED.

STAINLESS STEEL (316) 5/8" (16mm) THREADED ROD, WASHER, LOCK WASHER, & NUT. THREADED ROD LENGTH 9" (230mm) WITH 6" (150mm) EMBEDMENT. USE MIN. 8 ANCHORS. TO BE PROVIDED BY CONTRACTOR

FLOODED COLUMN

ENSURE LEVEL SURFACE. INSTALL Ø6" (150mm) X 1/8" (3mm) GASKET UNDER COLUMN PIPE FLANGE PROVIDED BY EMPEX

8- #4 @ 10" (250mm) EACH WAY

4- #4 @ 10" (250mm) EACH WAY

GRANULAR BASE

2" (50mm) PVC SCH 40 WATERFEED TO BE CUT CLOSE TO SURFACE TO ALLOW FOR DRAINAGE (WINTERIZATION)

35in
[889.0mm]

16in
[406.4mm]

8in [203.2mm]



Notes: Overall dimensions of toys are approximate.
Approximate Weight: 88lbs / 40kgs

© EMPEX WATERTOYS

WATER SUPPLY
50 gpm @ 10 psi
3.15 L/S @ 7m

AQUABRELLO MINI LARGE

T887L

10/12/2021

SCALE:

Sheet
1 of 1

1

2

3

4