

NOTES:


(1) PROVIDE ELECTRICAL BOND WITH POOL REBAR.

(2) 2 PART EPOXY MAY BE USED IN LIEU OF INSERT ANCHOR.


(3) PURGE ALL WATER SUPPLY LINES TO REMOVE SOLIDS PRIOR TO TOY INSTALLATION.

(4) INSTALL ALL WATER TOYS PLUMB AND LEVEL.

(5) PROVIDE STRAINER UPSTREAM OF TOY WITH MAX 1/32" (0.8mm) PERFORATIONS.

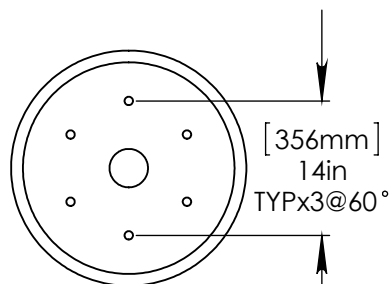

BOTTOM VIEW
ANCHOR PATTERN



LOWER TOY ONCE BASE IS ANCHORED TO THE GROUND.

2" (50mm) PVC SCH 40 PIPE EXTENDED 6" (150mm) ABOVE POOL SLAB.

1/2" (13mm) STAINLESS STEEL (316) THREADED ROD, WASHER, LOCK WASHER, & NUT. SUGGESTED 7" (180mm) THREADED ROD WITH 6" (150mm) EMBEDMENT.

2" (50mm) PVC SCH 40 WATER FEED.

[2134mm]
Ø 84in
SPRAY DIAMETER NTS

[704mm]
28in

[648mm]
Ø 26in

[1368mm]
54in
SPRAY HEIGHT

1" (25mm) HOSE SUPPLIED BY EMPEX.

2" (50mm) TO 1" (25mm) REDUCER TO BE SUPPLIED BY CONTRACTOR.

[203mm]
8in



Notes: Overall dimensions of toys are approximate.

© EMPEX WATERTOYS

WATER SUPPLY

20 gpm @ 25 psi
1.3L/S @ 17.5m

AQUABUG

TR271

12/9/2014

SCALE:
1:1

Sheet
1 of 1