

1

2

3

4

NOTES:

(1) PURGE ALL WATER SUPPLY LINES TO REMOVE SOLIDS PRIOR TO TOY INSTALLATION.

(2) PROVIDE ELECTRICAL BOND WITH POOL REBAR.

(3) INSTALL ALL WATER TOYS PLUMB AND LEVEL.

(4) PROVIDE STRAINER UPSTREAM OF TOY WITH MAX 1/32" (0.8mm) PERFORATIONS.

A

A

B

B

C

C

D





D

E


E

F

F

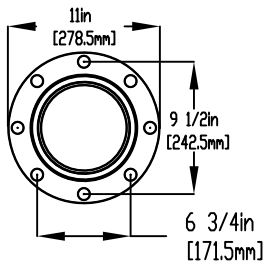


FLANGE DETAIL

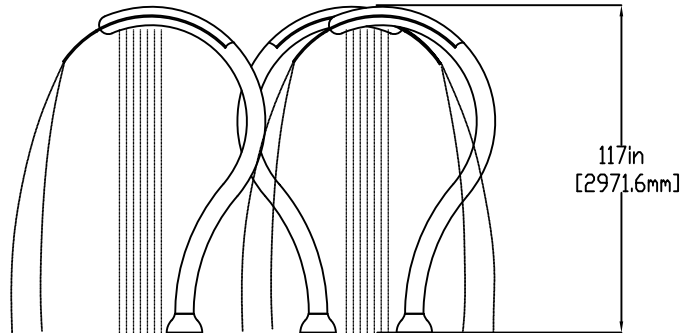

5/8" (16mm) X 9" (229mm) 316 SS
THREADED ROD, C/W FENDER WASHER
LOCK WASHER & NUT (X6) MINIMUM
6" EMBEDMENT, EPOXY SET
ANCHOR ADHESIVE (EACH LEG)
TO BE PROVIDED BY CONTRACTOR

LOWER FLANGE
COVERS AFTER TOY
IS INSTALLED

FLOODED COLUMN
ENSURE LEVEL & PLUMB
(6" 152mm) X 1/8" (3mm)
GASKET, INSTALLED UNDER FLANGE
TO BE PROVIDED BY EMPEX

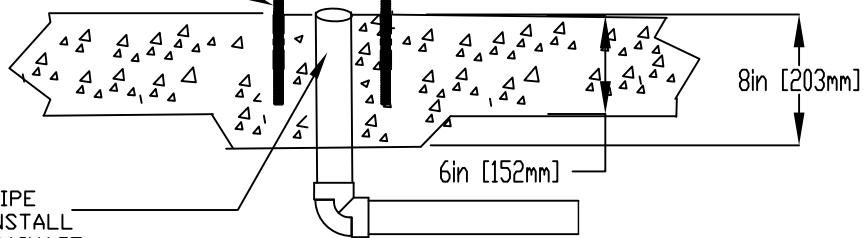

WATERFEED (PER UNIT)
2" (50MM) PVC SCH40 PIPE
CUT CLOSE PRIOR TO INSTALL
TO ALLOW FOR FULL DRAINAGE



Notes: Overall dimensions of toys are approximate.
Approximate Weight: 68lbs/30.9kgs per unit

© EMPEX WATERTOYS

WATER SUPPLY PER UNIT
70 gpm @ 25 psi
4.4L/S @17.5m

AQUAREED TRIO

M519-3

07/02/2024

SCALE:

Sheet
1 of 1

1

2

3

4